



- Using CMOS IC lower power consumption high reliability and stability
- ON-OFF timing adjustable individually repeat operation
- Two LEDs provide status indication for ON-OFF operations
- 16 different time ranges from 0.1sec to 24hrs available

## SPECIFICATIONS

MODEL		ST3PR
FULL TIME RANGE		6S/60S 10S/10M 30S/30M
RATED VOLTAGE		DC(V): 12, 24, 48 AC(V): 12, 24, 48, 110, 220, 240, 380, 415, 440, 50/60Hz
INDICATOR OPERATING		OFF-ON Operating
o/p C O N T A C T	MODEL	ST3PR
	TIME LIMIT 1C	5A
	TIME LIMIT 2C	
	INSTANTANEOUS 1C	
LIFE	MECHANICAL	$5 \times 10^6$ times
	ELECTRICAL	$10^5$ times
RESET TIME		0.2 sec max
CONSUMED POWER		2VA
AMBIENT TEMPERATURE		-10°C ~ + 55°C
AMBIENT HUMIDITY		45~85%RH
WEIGHT		Approx. 160g

## CONNECTION DIAGRAMS & TIMING CHARTS

### ST3PR

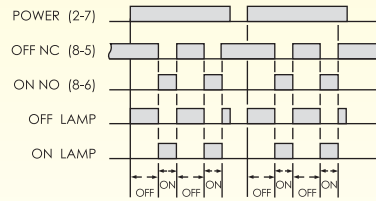

## DIMENSION

### ST3PR

