

ANY®

SOFT START CONTROL MODULE

SSC

<http://www.timer-switch.com>

INTRODUCTION

This mains operated soft start power module gives ramp up time of 12 seconds. The device starts from 10% loading and loads to 100% in 12 seconds. These units are capable of soft starting loads up to 25A (when mounted on a suitable heatsink)

APPLICATIONS




Suitable for most resistive and inductive loads within voltage and power limitation, such as heat lamps, fans, pumps and other ac motor loads.

FEATURES

- Compact and easy to use
- No need adjust ramp up time
- No need adjust pedestal
- Simple wiring
- High inrush capability



INSTALLATION

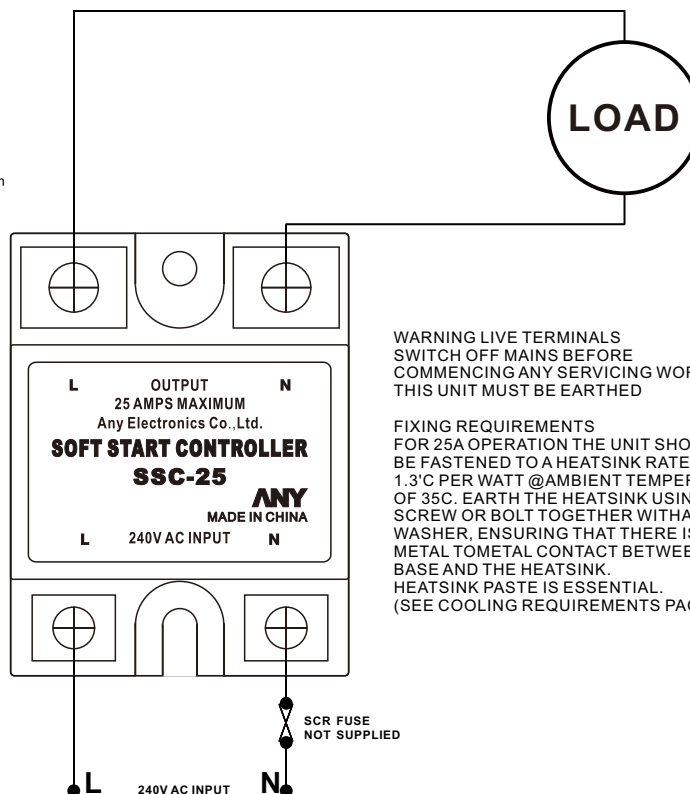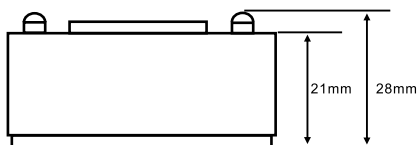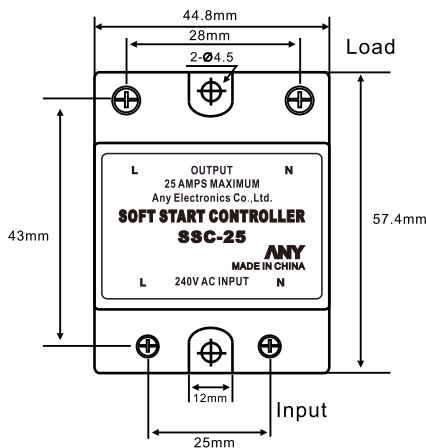


WARNING LIVE TERMINALS
SWITCH OFF MAINS BEFORE
COMMENCING ANY SERVICING WORK
THIS UNIT MUST BE EARTHED

FIXING REQUIREMENTS
FOR 25A OPERATION THE UNIT SHOULD
BE FASTENED TO A HEATSINK RATED AT
1.3°C PER WATT @ AMBIENT TEMPERATURE
OF 35°C. EARTH THE HEATSINK USING A 4mm
SCREW OR BOLT TOGETHER WITH A STAR
WASHER, ENSURING THAT THERE IS A GOOD
METAL TO METAL CONTACT BETWEEN THE
BASE AND THE HEATSINK.
HEATSINK PASTE IS ESSENTIAL.
(SEE COOLING REQUIREMENTS PAGE 2)

INSTALLATION

COOLING REQUIREMENTS

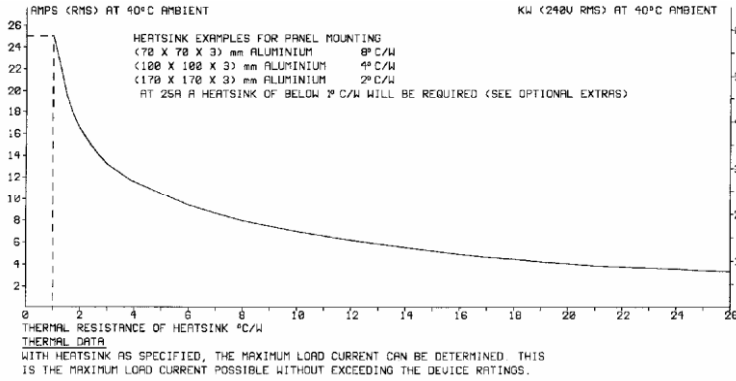

SPECIFICATIONS

AC system line voltage	110/230V \pm 10%	Line frequency	50/60Hz
Unit limiting RMS current	25A	I ² t for fusing	250 A ² s
Unit limiting RMS current	26A	Isolation voltage	5000V RMS
Minimum operating current	200mA	Ramp time	1 to 60 seconds
Unit current consumption	20mA dc Max	Pedestal	10 to 50%
Operating temperature	-20 to 85°C	Storage temperature	0 to 65°C

FUSING:

It is recommended to use semiconductor (fast acting) type fuses or circuit breakers (Semiconductor - MCB) for unit protection. On initial switch on some loads may need an increased Factor of Safety (F of S) for unit and/or device protection. (See the SRA Datasheet for further information)

CE MARKING

We are fully produced in accordance with CE standards. These phase angle type controllers require a suitable remote filter. For information see recommendation section and contact our sales desk. (See the Declaration of Conformity).

RECOMMENDATIONS

Other documents available on request, which may be appropriate for your application:

CODE	IDENTITY	DESCRIPTION
X10229	RFI	Single Phase Filtering recommendations - addressing EMC Directive
X10213	ITA	Interaction, uses for phase angle and for burst fire control.
X10255	SRA (LVD)	Safety requirements - addressing the Low Voltage Directive including: Thermal data/cooling; "Live" parts warning & Earth requirements; Fusing recommendations.
AP02/4	COS	UAL Conditions of sale.

NOTE It is recommended that installation and maintenance of this equipment should be done with reference to the current edition of the I.E.E. wiring regulations (Bs7671) by suitably qualified/trained personnel. The regulations contain important requirements regarding safety of electrical equipment (For) International Standards refer to I.E.D/ directive IEC 950.

ORDER CODE:

State part number: SSC25.
Optional extras include: Heatsink assembly.

ANY ELECTRONICS CO., LTD.

Tel: 0086(577) 6269 5889
Fax: 0086(577) 9873 6727
Email: info@timer-switch.com
Web: <https://www.timer-switch.com>
Date 25/07/2018