

# ANY Electronics

**MANUFACTURERS & EXPORTER OF  
COPPER BRAID BOND**



We as Amiable are the Manufacturer for Copper Braids and Copper Flexible Connectors and Laminated Copper Flexible Connectors

Our Firm Any Electronics, is well established organization in China and overseas market and Manufactures and Export the following products :

- 01) Copper Braided & Laminated Connectors
- 02) Exothermic Weld Powder & Graphite Molds
- 03) Brass Parts Components, Accessories and Fittings

As one of China's most respected corporations, we have earned good reputation amongst our customers with Quality Assurance, On time delivery and High Customer Satisfaction. To ensure consistent product quality, we work within a quality system:

ISO 9001 - 2008 certification

ISO 14001 certification

ISO 18001 certification

GMP Standard

CE Compliance

ROHS Compliance

Our Exothermic Weld Powder meets IEEE 837-2002 Standard & Certified by CPRI - Govt. for Short Circuit Current Testing and we are Crisil Verified Company.

Strict quality checks are carried out at different stages of manufacturing and only that material which passes stringent norms finds its way in the market around the Globe.

Any kind of special products made from Brass, Copper, Gunmetal, Bronze, Cast Iron, Malleable Iron & PVC can be developed, manufactured and supplied exactly as per customer specifications.

Our customer bases are distributors, wholesalers, electrical contractors and installers, maintenance people, government bodies, equipment manufacturers etc...

We always believe in the power of our brands in doing the right thing.

"We understands our Customers Values"

## COPPER BRAID BOND

Copper Braided Wire / Copper Braid Strips

We manufacture Copper Braided Wire in high grade Copper Quality.

Copper Material: Electrolytic Copper

Finish Offers: Bare Copper, Tinned Plated & Silver Plating

Wire Sizes Offer – From Swg 30 to Swg 45. Standard is 36 Gauge (0.2mm)

Cross Sectional Area Range: From 2 Sqmm and Above

We Manufacture the Following Basic Sizes for Copper Braid Bond:

Dimensions Width X Thick	Cross Section sq. mm	Appx.Weight per 100 Meters*	Current Rating Amps*	Product Code Sr. No.
4 X 1	2	2	25	CBS-0410
6 X 1	3.6	3.6	36	CBS-0610
8 X 1	5	5	47	CBS-0810
10 X 1	6.1	6.1	55	CBS-1010
10 X 2	9.8	9.8	83	CBS-1020
12 X 1	7	7	62	CBS-1210
12 x 1.5	8.40	8	40	CBS-1215
12 x 3	16.80	17	105	CBS-1230
19 x 1.5	12.10	12	63	CBS-1915
19 x 3	22.40	22.5	145	CBS-1930
25 x 1.5	19.60	20	85	CBS-2515
25 x 3	36.50	35	200	CBS-2530
25 x 6	73.00	72.5	400	CBS-2560
32 x 1.5	36.50	38	120	CBS-3215
32 x 3	42.10	42	240	CBS-3230
32 x 6	81.40	80	400	CBS-3260
38 x 3	53.30	52.0	300	CBS-3830
38 x 6	80.00	85	500	CBS-3860
50 x 3	70.20	70	400	CBS-5030
50 x 6	109.50	110	800	CBS-5060
50 x 12	280.00	275	1500	CBS-5012
75 x 6	140.40	140	1000	CBS-7560
90 x 12	240.00	330	40	CBS-9012

The Copper Braids are usually made in

- 36 Gauge SWG (0.02927 Sqmm per Wire i.e 0.193 wire diameter) - Standard


- 39 Gauge SWG (0.0137 Sqmm per Wire i.e 0.132 wire diameter)

- 42 Gauge SWG (0.008107per Wire i.e 0.102 wire diameter)

More the Gauge SWG – More will be Flexibility

\*\*\*Above are the Standard Size for the ready reference. Copper Braid Bond in any other sizes can be manufactured and supply

P.N-Current rating measured at 35°C room temperature and max. permitted Conductor Temp of 70°C, Since several influencing factors generally apply, the value specified for current rating must be considered as non-binding guideline values.




## Copper Braided Bond with Pipe Fittings

We manufacture Copper Braid Bond also called as Copper Flexible Connector.

Copper Material: Electrolytic Copper

Finish Offers: Bare Copper & Tinned Plated

Wire Sizes Offer – From 30 swg to 45 swg. Standard is 36 swg (0.2mm)

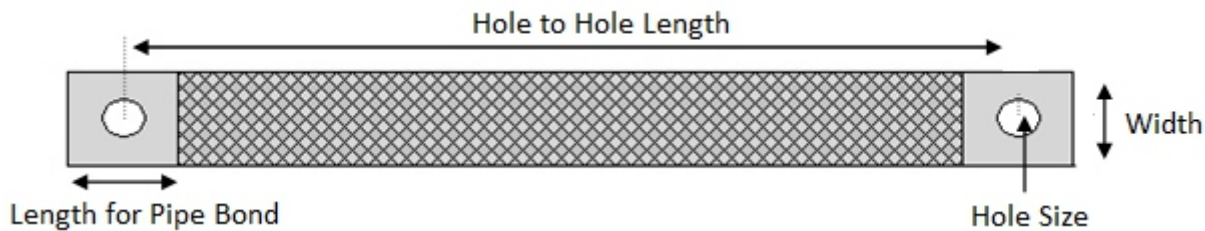

The Copper Braid with Pipe Bond is Customized Design and we manufacture as per Customers Specification depending on their Current rating and Cross Sectional Requirement.

OR

Our Customers need to give following Information in order to submit the Quote for any inquiry:

- 1) Copper Braid Width (Width)
- 2) Hole to Hole Length
- 3) Length for Pipe Bond (Normally it's the same of Width)
- 4) Thickness of Copper Braid
- 5) Hole Size
- 6) Wire Diameter (Usually its Manufactured in 36 Swg (Gauge))

The above require information can also be referred on Page 4 from the same Catalog given above




## Copper Wire Braided Strip with Lugs Fittings

Copper Material: Electrolytic Copper

Finish Offers: Bare Copper & Tinned Plated

Wire Sizes Offer – From 30 swg to 45 swg. Standard is 36 swg (0.2mm)



The Copper Braid with Copper Lugs Bond is Customized Design and we manufacture as per Customers Specification depending on their Current rating and Cross Sectional Requirement.

OR

Our Customers need to give following Information in order to submit the Quote for any inquiry:

- 1) Total Width of the Copper Braid
- 2) Hole to Hole Length
- 3) Cable Lugs Size
- 4) Thickness of Copper Braid
- 5) Hole Size
- 6) Wire Diameter (Usually its Manufactured in 36 Swg (Gauge))

The above require information can also be referred on Page 4 from the same Catalog given above

## Copper Braided Wire Rope with Lugs Fittings

Copper Material: Electrolytic Copper

Finish Offers: Bare Copper & Tinned Plated

Wire Sizes Offer – From 30 swg to 45 swg. Standard is 36 swg (0.2mm)



The Copper Braided Rope with Copper Lugs Bond is Customized Design and we manufacture as per Customers Specification depending on their Current rating and Cross Sectional Requirement.

The above require information can also be referred on Page 5 from the same Catalog given above.