

ANY Electronics

**MANUFACTURERS & EXPORTER OF
COPPER BRAID**



We as Amiable are the Manufacturer for Copper Braids and Copper Flexible Connectors and Laminated Copper Flexible Connectors

Our Firm Any Electronics, is well established organization in China and overseas market and Manufactures and Export the following products :

01)Copper Braided & Laminated Connectors

02)Exothermic Weld Powder & Graphite Molds

03)Brass Parts Components, Accessories and Fittings

As one of China's most respected corporations, we have earned good reputation amongst our customers with Quality Assurance, On time delivery and High Customer Satisfaction. To ensure consistent product quality, we work with in a quality system:

ISO 9001-2008 certification

ISO 14001 certification

ISO 18001 certification

GMP Standard

CE Compliance

ROHS Compliance

Our Exothermic Weld Powder meets IEEE 837-2002 Standard & Certified by CPRI-Govt. for Short Circuit Current Testing and we are Crisil Verified Company. Strict quality checks are carried out at different stages of manufacturing and only that material which passes stringent norms finds its way in the market around the Globe.

Any kind of special products made from Brass, Copper, Gunmetal, Bronze, Cast Iron, Malleable Iron & PVC can be developed, manufactured and supplied exactly as per customer specifications.

Our customer bases are distributors, wholesalers, electrical contractors and installers, maintenance people, government bodies, equipment manufacturers etc...

We always believe in the power of our brands in doing the right thing.

“We understands our Customers Values”

We are the Manufacturer and Supplier of Copper Braid. Our most economical standard copper braid are made from 0.20 diameter wire and are braided into a tube followed by a rolling process to flatten them. They are used as earthing straps and are also used in numerous electrical components. All types can be supplied in non rolled form, as multiple tubes and for screening. It is highly copper flexible pressed, Bare, Tin & Silver Coated. Flat Braid is mainly used for Earthing Connection & terminals etc.

COPPER BRAID

Copper Braided Wire / Copper Braid Strips

We manufacture Copper Braided Wire in high grade Copper Quality.

Copper Material: Electrolytic Copper

Finish Offers: Bare Copper, Tinned Plated & Silver Plating

Wire Sizes Offer - From Swg 30 to Swg 45. Standard is 36 Gauge (0.2mm)

Cross Sectional Area Range: From 2 Sqmm and Above



We Manufacture the Following Basic Sizes for Copper Braid:

Dimensions Width X Thick	Cross Section sq. mm	Appx. Weight per 100 Meters*	Current Rating Amps*	Product Code Sr. No.
4 X 1	2.00	2.00	25	CBS-0410
6 X 1	3.60	3.60	36	CBS-0610
8 X 1	5.00	5.00	47	CBS-0810
10 X 1	6.10	6.10	55	CBS-1010
10 X 2	9.80	9.80	83	CBS-1020
12 X 1	7.00	7.00	62	CBS-1210
12 x 1.5	8.40	8.00	40	CBS-1215
12 x 3	16.80	17.00	105	CBS-1230
19 x 1.5	12.10	12.00	63	CBS-1915
19 x 3	22.40	22.50	145	CBS-1930
25 x 1.5	19.60	20.00	85	CBS-2515
25 x 3	36.50	35.00	200	CBS-2530
25 x 6	73.00	72.50	400	CBS-2560
32 x 1.5	36.50	38.00	120	CBS-3215
32 x 3	42.10	42.00	240	CBS-3230
32 x 6	81.40	80.00	400	CBS-3260
38 x 3	53.30	52.50	300	CBS-3830
38 x 6	80.00	85.00	500	CBS-3860
50 x 3	70.20	70.00	400	CBS-5030
50 x 6	109.50	110.00	800	CBS-5060
50 x 12	280.00	275.00	1500	CBS-5012
75 x 6	140.40	140.00	1000	CBS-7560
90 x 12	240.00	330.00	40	CBS-9012



The Copper Braids are usually made in

-36 Gauge SWG (0.02927 Sqmm per Wire i.e 0.193 wire diameter)- Standard

-39 Gauge SWG (0.0137 Sqmm per Wire i.e 0.132 wire diameter)

-42 Gauge SWG (0.008107per Wire i.e 0.102 wire diameter)

More the Gauge SWG - More will be Flexibility

***Above are the Standard Size for the ready reference. Copper Braids in any other sizes can be manufactured and supply

P.N-Current rating measured at 35°C room temperature and max. permitted Conductor Temp of 70°C, Since several influencing factors generally apply, the value specified for current rating must be considered as non-binding guideline values.

We offer a wide choice of Copper Braid types(flat, round, rope and layered), strand sizes, finishes, termination options(crimped, pressed and swaged), insulation and identification, Our highly flexible earthing connectors and earth leads are commonly used in switchgear, building services and a wide range of industries. We offer competitive pricing and ex-stock or short lead time deliveries.

These can be made from electrolytic copper Cu-ETP(grade C101) or from oxygen free copper

Even though many of our products are standard items,we also make special tailor made products made exactly to the requirements of our customers.

We use the finest quality material of Copper Braid to ensure consistency of quality and performance, drawing on our supplier's decades of experience in drawing, stranding and braiding, as well as surface treatment.

Copper Braid Construction

The construction of Copper braid is usually written as:

48 / 30 / 0.15, where:

48 = the number of carriers

30 = the number of wires per carrier

0.15 = the diameter of each wire in mm

The cross sectional area(CSA) of a copper braid can be calculated from this information:

(Carriers X wires per carries X wire diameter² X 3.142)/ 4

So, for a copper braid with the specification: 48 / 30 / 0.15, this would be:

$48 \times 30 \times 0.15^2 \times 3.142 / 4 = 101.80$

= 25.45 mm

Oxygen Free Copper Braided

Oxygen-free high thermal conductivity (OFHC) copper is widely used in cryogenics. OFHC is produced by the direct conversion of selected refined cathodes and castings under carefully

controlled conditions to prevent contamination of the pure oxygen-free metal during processing.

The method of producing OFHC copper insures extra high grade of metal with a copper content of 99.99%.

With so small a content of extraneous elements, the inherent properties of elemental copper are brought forth to a high degree. Characteristics are high ductility, high electrical and thermal conductivity, high impact strength, good creep resistance, ease of welding, and low relative volatility under high vacuum. We supply a range of oxygen free copper for use in scientific, industrial and medical processes.

- Copper alloy 10100 oxygen free copper, also known in Europe as Cu-OF or CW008A to EN13601.

- Composition: Copper 99.99%, Trillium 0.0001 %

- Hardness: B30 - 40

- Conductivity: 101 %

- Tensile strength: 25 40 Ksi

Copper Braided Sleeve (EXPANDABLES)

Copper Material: Electrolytic Copper


Finish Offers: Bare Copper, Tinned Plated, Silver Plated

Wire Sizes Offer - From 30 swg to 45 swg. Standard is 36 swg (0.2mm)

Cross Sectional Area Range: From 1.5 Sqmm and Above

We Manufacture the below Copper Braided Sleeves

Former OD mm	Coverage %	Usable Max	OD (mm) Min	Item Code Sr.No.
3	80-90	5	2	CSB-0300
4	80-90	6	3	CSB-0400
5	80-90	8	4	CSB-0500
6	80-90	12	5	CSB-0600
8	80-90	14	6	CSB-0800
10	80-90	16	8	CSB-1000
12	80-90	18	10	CSB-1200

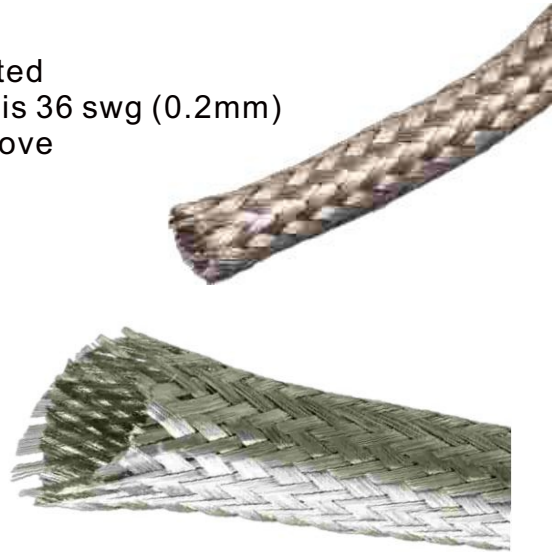

***Above are the Standard Size for the ready reference. Copper Braids in any other sizes can be Manufactured and supply

For more details or any queries in terms for Braided Copper please visit us at <http://www.timer-switch.com> or mail us at info@timer-switch.com

Fields Name:

We are manufacturer and supplier of Copper Braids like:

Copper Braided, Copper Braided Connector, Copper Braided Flexible Connector, Copper Braid, Copper Braids, Copper Braided Bond, Copper Braided Straps, Copper Braided Earth Straps, Tinned Copper Braided, Tinned Copper Braided Connector, Tinned Copper Braided Flexible Connector, Tinned Copper Braid, Tinned Copper Braids, Tinned Copper Braided Bond, Tinned Copper Braided Straps, Tinned Copper Braided Earth Straps.